


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ANDERSON POWER PRODUCTS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ANDERSON POWER PRODUCTS IS PROHIBITED.

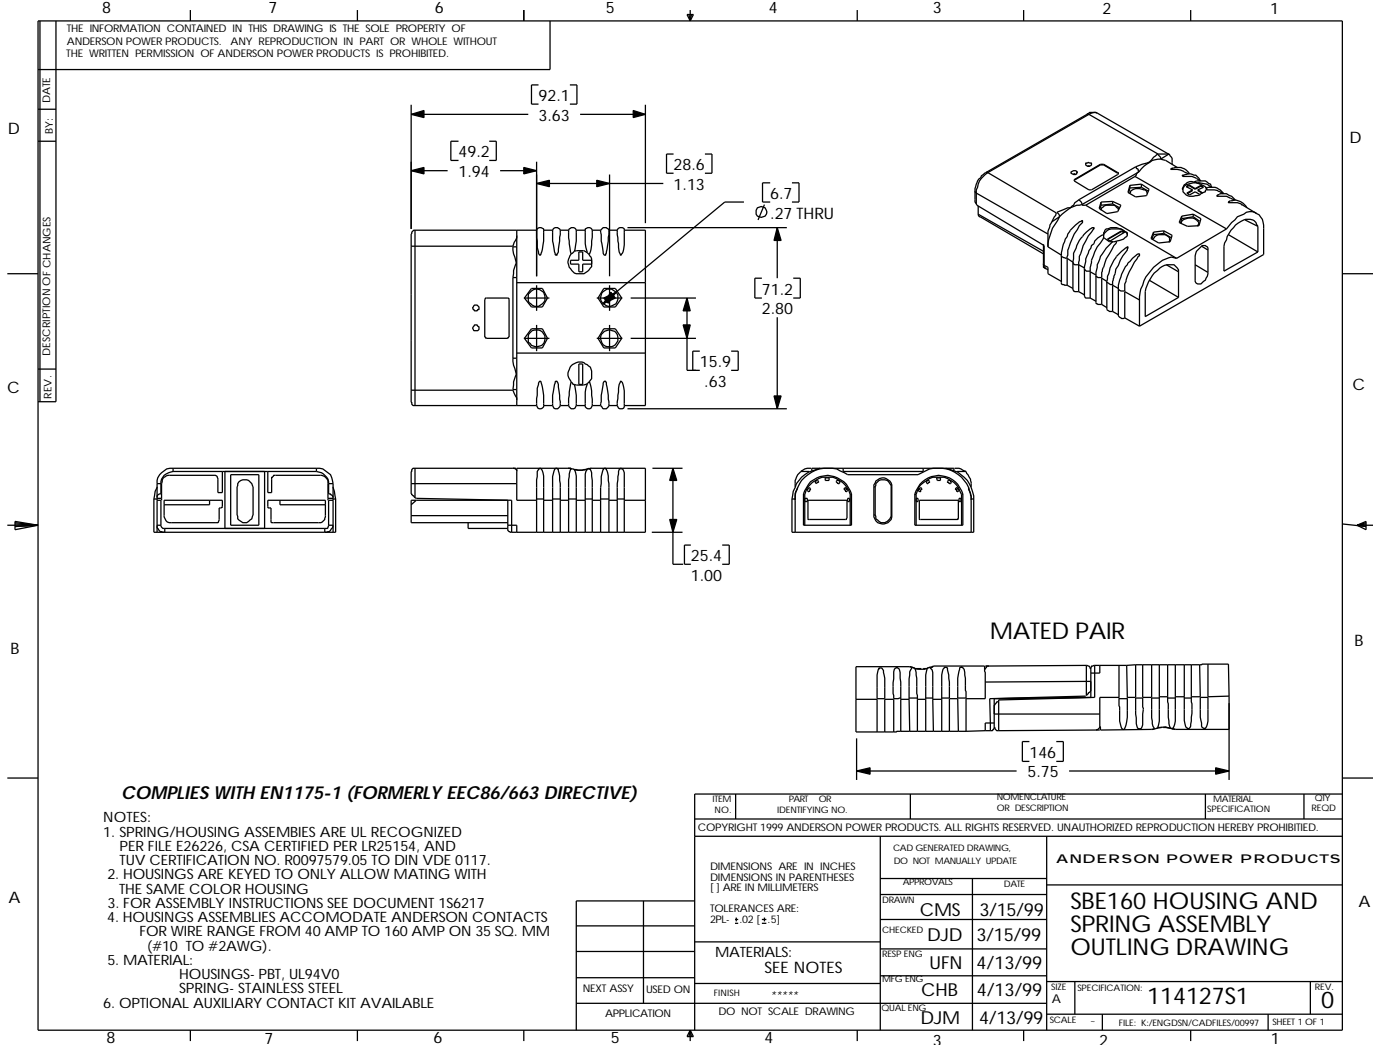

**COMPLIES WITH EN1175-1 (FORMERLY EEC86/663 DIRECTIVE)**

- NOTES:
1. SPRING/HOUSING ASSEMBLIES ARE UL RECOGNIZED PER FILE E26226, CSA CERTIFIED PER LR25154, AND TUV CERTIFICATION NO. R0097579.05 TO DIN VDE 0117.
  2. HOUSINGS ARE KEYPED TO ONLY ALLOW MATING WITH THE SAME COLOR HOUSING
  3. FOR ASSEMBLY INSTRUCTIONS SEE DOCUMENT 1S6217
  4. HOUSINGS ASSEMBLIES ACCOMODATE ANDERSON CONTACTS FOR WIRE RANGE FROM 40 AMP TO 160 AMP ON 35 SQ. MM (#10 TO #2AWG).
  5. MATERIAL:  
HOUSINGS- PBT, UL94V0  
SPRING- STAINLESS STEEL
  6. OPTIONAL AUXILIARY CONTACT KIT AVAILABLE

NEXT ASSY	USED ON
APPLICATION	DO NOT SCALE DRAWING

ITEM NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	QTY RECD
COPYRIGHT 1999 ANDERSON POWER PRODUCTS. ALL RIGHTS RESERVED. UNAUTHORIZED REPRODUCTION HEREBY PROHIBITED.				
DIMENSIONS ARE IN INCHES DIMENSIONS IN PARENTHESES [ ] ARE IN MILLIMETERS		CAD GENERATED DRAWING. DO NOT MANUALLY UPDATE		
TOLERANCES ARE: 2PL - ±.02 [±.5]		ANDERSON POWER PRODUCTS		
MATERIALS: SEE NOTES		SBE160 HOUSING AND SPRING ASSEMBLY OUTLING DRAWING		
FINISH *****		SPECIFICATION: 114127S1		
APPLICATION		REV 0		
		SCALE - FILE: K:/ENGLISH/CADFILES/00997 SHEET 1 OF 1		

APPROVALS		DATE
DRAWN	CMS	3/15/99
CHECKED	DJD	3/15/99
RESP ENG	UFN	4/13/99
MFG ENG	CHB	4/13/99
CIAL ENG	DJM	4/13/99